

RESERVE COPY

# PATENT SPECIFICATION

DRAWINGS ATTACHED

*Inventor:* WILLIAM CHARLES CARLTON

1112,028



1,112,028

Date of filing Complete Specification (under Section 3 (3) of the Patents Act 1949): 18 April, 1966.

Application Date: 19 Jan., 1966.

Application Date: 26 Feb., 1966.

Complete Specification Published: 1 May, 1968.

© Crown Copyright 1968.

No. 2401/66.

No. 8549/66.

Index at acceptance: —A6 D25A

Int. Cl.: —A 63 b 49/00

## COMPLETE SPECIFICATION

### Improvements in or relating to Racket Frames, and Methods of Manufacturing same

5 We, THE CARLTON TYRE SAVING COMPANY LIMITED, Shire Hill, Saffron Walden, Essex, a British Company, do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—

10 This invention relates to racket frames for rackets for use, for example, in badminton, tennis and squash, and to methods of manufacturing such racket frames.

15 In this specification the term "frame" means the looped portion of a racket within which the stringing is carried out, as distinct from the shaft of the racket which connects the frame to the handle. Holes are provided in the frame for the strings of the racket.

20 It has been proposed to make rackets having steel frames and also rackets having steel shafts, but the use of steel frames has met with some difficulties, especially due to the sharp edges of the steel cutting the strings, either during the stringing or in use of the racket. In the case of tennis rackets this difficulty has been alleviated by such methods as the use of auxiliary eyelets in the holes provided in the frame for the stringing, or the use of wire around the frame. However, such methods add considerably to the complexity and cost of manufacture of the racket, and in the case of badminton rackets, which must be very light, such methods are not suitable due to the associated increase in weight of the frame.

35 It is an object of this invention to produce a metal frame for a racket which can be made light enough to be acceptable as a top class badminton racket, and also to produce, by a similar technique but in appropri-

ately different sizes and weights, improved forms of other types of racket frames, such as tennis and squash racket frames.

45 According to one feature of the invention there is provided a racket frame formed from a metal tube having apertures in said tube for stringing, said apertures having integral flanges projecting towards the interior of the tube to provide surfaces for said stringing both on the inside and outside of the racket frame and characterised in that the metal of the tube is malleable to enable the integral flanged apertures to be formed and to enable the tube to be formed into said frame and said metal has been hardened after said forming.

60 By an "integral flange" is meant that metal of the tube surrounding a hole in said tube is used to form the flange, the inner edge of said surrounding metal having been turned through substantially 90° from its original position in the tube, at least in the longitudinal direction of said tube, so that said flange forms a smooth surface for the stringing.

65 In one embodiment of the invention the wall thickness of the tubular frame is between .012 inch and .014 inch. Preferably the tube has recesses on its outside between integral flanged apertures.

70 According to another feature of the invention there is provided a method of manufacturing a racket frame as described above, characterised in forming the integral flanged apertures in said tube and forming said tube into said frame, in either order, whilst said metal is malleable, and then hardening the metal of said tube after the forming operations have been completed.

80 By way of example, to make a frame for a top class badminton racket the metal tube

[Price

Price

may have a wall thickness of between .012 of an inch and .014 of an inch (.305 mm/.355 mm), as described in the complete specification of co-pending Patent Application No. 9965/67 (Serial No. 1,112,030). The material of said tube is a steel having in its malleable state a 0.2% proof stress not exceeding 30 tons per square inch, and a maximum stress not exceeding 55 tons per square inch, but which can be hardened to a condition in which it has an 0.2% proof stress and a maximum stress of not less than 70 tons per square inch and, preferably, the maximum stress should be not less than 80 tons per square inch. Moreover, in its malleable state the steel has an elongation on 2 inches (50.8 mm) of not less than 25%, while in its hardened state it has an elongation on 2 inches (50.8 mm) of not more than 15%. The forming operation which will later be described for such a material being used will be completed when the material is in its malleable state and the frame is completed by hardening the material after the forming operations. Metals having the above characteristics and otherwise suitable, e.g. they must not be too brittle, may be used. Such a metal is identified by FV. 5205, which is a steel available from the Firth Vickers Company Limited, but the invention is not limited to the use of this material.

In one embodiment of the invention, which is especially suitable for the manufacture of badminton racket frames in which a light weight is required, the metal tube has inserted therein a strip of plastics material, such as nylon, having preformed suitably positioned and sized holes therein, prior to the flanging of the apertures in the metal frame. The holes in the plastics strip are larger than those required in the metal frame to accommodate the racket stringing, and are positioned to be concentric with said required apertures. During flanging of the apertures in the metal frame the plastics strip acts as a female die in a punching operation. The plastics strip may be removed by heating to melt the plastics material, for example, during a hardening process for the metal tube. Alternatively, the flanged apertures may be formed in the metal frame without the insertion of such a strip of plastics material.

In another embodiment of the invention, which is more suitable for the manufacture of rackets which are required to be of a certain weight, and not as light as possible, for example, tennis and squash rackets, an inner metal member is provided within the metal tube of the racket frame. The inner metal member may be tubular or solid, or part tubular and part solid, and it may extend throughout substantially the whole of the metal tube or only a part of it. The inner metal member is provided with holes therein which are larger than those required in the

outer metal tube and are positioned to be concentric with said required apertures. During a forming operation in which the flanged apertures in the outer metal tube are formed, the inner metal member serves as a female die, the arrangement being such that the flanges of the apertures in the outer metal tube extend within the larger holes in the inner metal member. The inner metal member is not subsequently removed but forms a part of the finished racket and can be arranged to impart a desired weight and weight distribution to the racket. The inner metal member is made of a material which is malleable to enable it to be formed into the shape of the relevant part of the frame of the racket, and preferably the material of said inner metal member is hardenable coincidentally with the material of the metal tube, after the frame and the flanged apertures have been formed. Alternatively, the material of the inner metal member may be such that substantially no hardening or deterioration occurs during the hardening of the metal tube.

In order that the invention may be clearly understood and readily carried into effect it will now be more fully described with reference to the accompanying drawings, in which:—

Figure 1 shows a racket in accordance with one embodiment of the invention, the stringing having been omitted,

Figure 2 shows on a reduced scale a racket according to another embodiment of the invention, the stringing again having been omitted,

Figure 3 shows, on an enlarged scale, a side elevation of a portion of the frame of the racket of Figure 1 or 2,

Figure 4 shows, on the same enlarged scale, a longitudinal section through a part of the tube from which the frame is made but before the tube is formed into a frame,

Figure 5 shows, on the same enlarged scale, a cross section through the frame of the racket of Figure 1 or 2, on the line V—V of Figure 3,

Figure 6 shows a racket in accordance with yet another embodiment of the invention,

Figures 7 and 8 are cross sections through the frame of the racket of Figure 6 on the lines VII—VII and VIII—VIII respectively, and on an enlarged scale,

Figure 9 shows a racket in accordance with a still further embodiment of the invention, and

Figures 10 and 11 are cross sections through the frame of the racket of Figure 9 on the lines X—X and XI—XI respectively.

Referring initially to Figures 1 to 4 of the drawings, the invention will be described, by way of example, as applied to embodiments of a badminton racket. The badminton racket shown in Figure 1 comprises a frame

70

75

80

85

90

95

100

105

110

115

120

125

130

1 formed from a metal tube in a manner which will be described in greater detail hereinafter in connection with Figures 3 to 5. The racket of Figure 1 also comprises  
 5 a metal shaft 2 which connects the frame 1 to a handle 3, which may be made from moulded plastics material or may be of any other suitable form. The shaft 2, in this  
 10 embodiment, is a single tubular shaft which may be separately formed from the frame 1 and secured, such as by brazing or welding to the two ends of the tube forming said frame 1. Alternatively, the shaft 2 may be  
 15 constituted by an extension of one end of said tube forming the frame 1, the other end of said tube being brazed to said one end. The stringing for the racket is not shown.

In an alternative construction, illustrated in Figure 2, in which references 1', 2' and 3'  
 20 are used for the frame, shaft and handle of the racket, both ends of a metal tube forming the frame 1' are extended to form the shaft 2' so that the shaft 2' is a doubled tube shaft. The two tubes of the shaft 2' may be secured  
 25 together along their lengths, such as by brazing or welding and the handle 3' may be moulded or otherwise formed over the ends of the two tubes.

The construction of the frames of the rackets in Figures 1 and 2 is the same and this will now be described in greater detail with reference to Figures 3, 4 and 5. The metal tube of which the frame 1  
 30 (or 1') is made is provided with a plurality of holes 4 therethrough positioned to accommodate the required strings of the racket. These holes, and their surrounding metal, are referred to as apertures. The holes 4 are bounded by flanges 5 which can  
 40 be seen most clearly in Figures 4 and 5 and which project towards the interior of the tube and are integral with the tube. The flanges project towards the interior of the tube and provide a smooth surface for the strings both on the inside and outside of  
 45 the racket frame. This greatly increases the life of the strings. In the particular embodiments illustrated, the outer periphery of the frame 1, as indicated by the arrow in Figure  
 50 1 is provided with a recess or groove 6, visible in Figures 3, 4 and 5, to accommodate the strings between the apertures 4.

Although in the particular embodiments described the tube forming the frame 1 or 1'  
 55 is shown to be predominantly of circular bore (apart from the groove 6), as an alternative the bore may be elliptical, or otherwise suitably shaped.

In manufacturing the frame of the racket described with reference to Figure 1 or 2  
 60 together with Figures 3 to 5 a metal tube, for example, of a steel having the characteristics hereinbefore stated as suitable for working in a malleable state has whilst in its  
 65 malleable state the flanged apertures 4 and

the grooves 6 formed in it by making small holes and then forming the metal tube to enlarge the holes and form the inwardly projecting flanges 5 and grooves 6. Whilst  
 70 still in its malleable state the tube is formed into a loop. It is preferable, but not essential, that the forming should be done in the above order. The frame 1 or 1' with the flanged  
 75 apertures 4 formed therein is subsequently hardened by a suitable hardening process, for example, by heat treatment.

In a modified method of manufacturing the racket, a strip of plastics material, such as nylon, is inserted into the metal tube, said  
 80 plastics strip being of such a thickness as to be a close sliding fit with respect to the wall portions of the metal tube which are to be apertured. The plastics strip has therein holes positioned to be concentric with  
 85 the required apertures in the metal tube, but larger than said required apertures. The plastics strip acts as a female die during a punching operation for forming the flanged apertures 4 in the metal tube, the flanges  
 90 5 projecting within the apertures in the plastics strip. The plastics strip may subsequently be removed by heating to melt the plastics material. By way of example, said plastics strip may be removed during a  
 95 hardening process for the metal tube.

Although the embodiments of Figures 1 to 5 have been particularly described with respect to the manufacture of badminton rackets, a similar method and construction  
 100 may be employed for other rackets such as tennis and squash rackets with a suitable adaptation of size and weight of the racket frame.

The invention will now be described with reference to the embodiments of Figures 6  
 105 to 11 as applied to a squash racket frame.

In the embodiment of Figures 6 to 8 a squash racket comprises a frame 7, a shaft 8 and a handle 9. The handle 9 may be a  
 110 moulded plastics one or may be of other suitable form. The shaft 8 may be in the form of a metal tube which may be separate from the frame of the racket but secured thereto or may be an extension of a metal tube forming a part of the frame 7 of the  
 115 racket. The frame 7 comprises a metal tube 10 formed with apertures 11 having inwardly projecting flanges 12 as previously described with reference to the embodiments of Figures 1 to 5. Moreover, the outer  
 120 periphery of the metal tube 10 is provided with a recess or groove 13 similar to the groove 6 of the previously described embodiments. In this particular embodiment of the invention, in addition to the metal tube 10,  
 125 the frame comprises an inner metal member 14 disposed within the metal tube 10 and having holes therein concentric with the apertures in the metal tube 10 but larger than the last mentioned apertures so that the  
 130

flanges 12 project within the holes in the inner metal member 14. In the embodiment of Figures 6 to 8 the inner metal member 14 comprises a tubular member with a solid insert 14a in a portion of its length. This portion of the length of the inner metal member is arranged to be at the remote end of the frame 7 from the shaft 8, and thus imparts additional weight, if required, to said remote end. The particular length and density of the solid insert 14a may be chosen in accordance with the desired weight of the racket.

In manufacturing the racket of Figures 6 to 8, the inner metal member 14, formed with holes therethrough as described, is inserted in the metal tube 10, in which it is preferably arranged to be a sliding fit. Preferably both the metal tube 10 and the inner metal member 14, which includes the solid insert 14a, are made of a steel having the characteristic defined hereinbefore, although other metals with suitable properties may be employed. The metal tube 10 containing the inner metal member 14 correctly positioned therein is then formed into a loop to form the frame of the racket, the inner metal member 14 taking up the same configuration in the part of the frame in which it is situated. Small holes are then made in the metal tube 10 in appropriate positions for the racket strings, and apertures having flanges 15 are then formed employing a punching operation during which the inner metal member 14, where this is provided, acts as the female die. Alternatively, the loop may be formed after the punching operation to form the flanged apertures. Subsequently the metal tube 10 of the frame is hardened by any suitable process, for example, by heat treatment. Depending upon the material of the inner metal member 14 this may be hardened coincidentally, or may remain in its malleable state.

In the embodiment of Figures 9 to 11 like reference numerals, but with the appendix', are employed to indicate parts corresponding to those in the embodiment of Figures 6 to 8. The embodiment of Figures 9 to 11 differs from that of Figures 6 to 8 in the length and form of the inner metal member 14. More precisely the inner metal member 14' is a tubular member without a solid insert, and is of shorter length than the inner metal member 14. This can be seen in Figure 9 in which the outline of the inner metal member 14' is shown dotted. The frame of the racket shown in Figure 9 can be manufactured in a manner similar to that already described with reference to the frame of the racket in Figure 6.

The shaft 8' of the racket of Figure 9 is a double tubular one as shown, formed by a continuation of the ends of the metal tube 10'. The handle 9' is formed over

the ends of said continuations, and may be a moulded plastics one or of other suitable form.

Although the invention has been described with reference to particular embodiments thereof, these may be modified in various ways without departing from the scope of the claims. By way of example, the embodiments of Figures 6 and 9 may be varied by varying the lengths of the inner metal members 14, 14'. Moreover, the inner metal member in either of these embodiments may be replaced by a solid member, or the solid insert in the embodiment of Figure 6 may be provided throughout the whole of the extent of the inner metal member, or any other suitable part thereof.

#### WHAT WE CLAIM IS:—

1. A racket frame formed from a metal tube having apertures in said tube for stringing, said apertures having integral flanges projecting towards the interior of the tube to provide surfaces for said stringing both on the inside and outside of the racket frame, and characterised in that the metal of the tube is malleable to enable the integral flanged apertures to be formed and to enable the tube to be formed into said frame and said metal has been hardened after said forming.

2. A racket frame as claimed in Claim 1, characterised in that the wall thickness of the metal tube is less than .014 inch.

3. A racket frame as claimed in Claim 1 or 2, characterised in that the tube has recesses on its outside between integral flanged apertures.

4. A method of manufacturing a racket frame as claimed in Claim 1, 2 or 3, characterised in forming the integral flanged apertures in said tube and forming said tube into said frame, in either order, whilst said metal is malleable, and then hardening the metal of said tube after the forming operations have been completed.

5. A racket frame as claimed in Claim 1, 2 or 3, or a method as claimed in Claim 4, characterised in that said metal is a steel having in its malleable state a 0.2% proof stress not exceeding 30 tons per square inch, and a maximum stress not exceeding 55 tons per square inch, and which can be hardened to a condition in which it has a 0.2% proof stress and a maximum stress of not less than 70 tons per square inch and is otherwise suitable.

6. A method as claimed in Claim 4 or 5 characterised in that said apertures are formed employing a punching operation during which said flanges are formed.

7. A method as claimed in Claim 6, characterised in that a strip of plastics material is inserted in said metal tube before the formation of the integral flanged apertures, said plastics strip having holes therethrough suit-

- ably positioned to be concentric with the required flanged apertures and of larger size than said required flanged apertures, and said plastics strip is used as a female die during said punching operation. 5
8. A method as claimed in Claim 7 characterised in that said plastics strip is removed after the formation of said flanged apertures by heating to melt the plastics material. 10
9. A method as claimed in Claim 8 characterised in that said plastics material is removed during a heating operation to harden the material of said metal tube. 15
10. A racket frame as claimed in Claim 1, 2, 3 or 5, characterised in that an inner metal member is provided within the metal tube, having therein holes positioned to be concentric with integral flanged apertures in said tube and larger than said flanged apertures, the arrangement being such that the flanges of apertures in said metal tube extend within the larger holes in said inner metal member. 20
11. A method as claimed in Claim 4 or 5, characterised in that an inner metal member is inserted in said metal tube, said inner metal member having holes therein positioned to be concentric with required integral flanged apertures in said metal tube, and larger than said required apertures, and said required flanged apertures are subsequently formed in said metal tube so that the flanges of said required apertures extend within the 25 apertures in said inner metal member. 30 35
12. A method as claimed in Claim 11 characterised in employing said inner metal member as a female die during a punching operation employed to form said flanged apertures. 40
13. A racket frame as claimed in any preceding Claim 1, 2, 3, 5 or 10, or a method as claimed in any preceding Claim 4 to 9 or 11 or 12, characterised in that one end of said metal tube is extended to form a shaft for the said racket. 45
14. A racket frame as claimed in any preceding Claim 1, 2, 3, 5, 6 or 10, or a method as claimed in any preceding Claim 4 to 9 or 11 or 12, characterised in that both ends of said metal tube are extended to form a shaft for the racket. 50
15. A racket frame as claimed in Claim 1 substantially as described with reference to Figures 1, 3, 4 and 5 or 2 to 5 or 6 to 8 or 9 to 11 of the drawings or modified in any of the manners herein described. 55
16. A method of manufacturing a racket frame as claimed in Claim 1 substantially as described with reference to Figures 1, 3, 4 and 5 or 2 to 5 or 6 to 8 or 9 to 11 of the drawings or modified in any of the manners herein described. 60
17. A racket frame when manufactured by a method as claimed in any preceding Claim 4 to 9 or 11 to 14 or 16. 65
18. A racket comprising a frame for stringing as claimed in Claim 1, 2, 3, 5, 10, 13, 14, 15 or 17.

SHIRLEY M. HARDING.

FIG. 1.

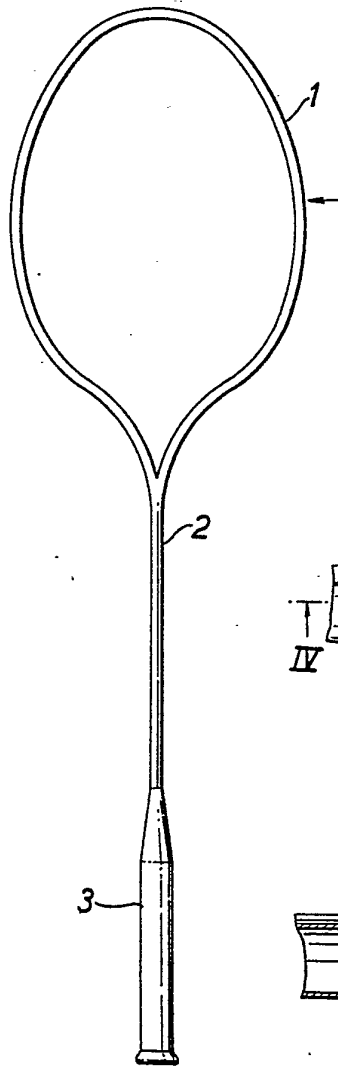


FIG. 2.

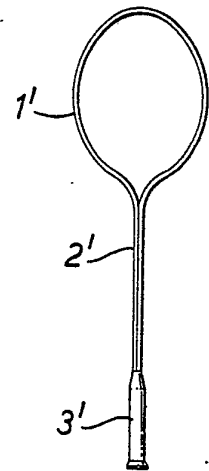


FIG. 3.

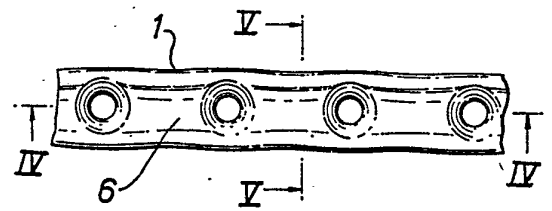


FIG. 4.





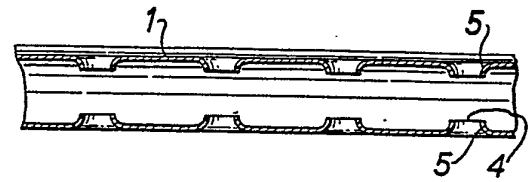


FIG. 5.

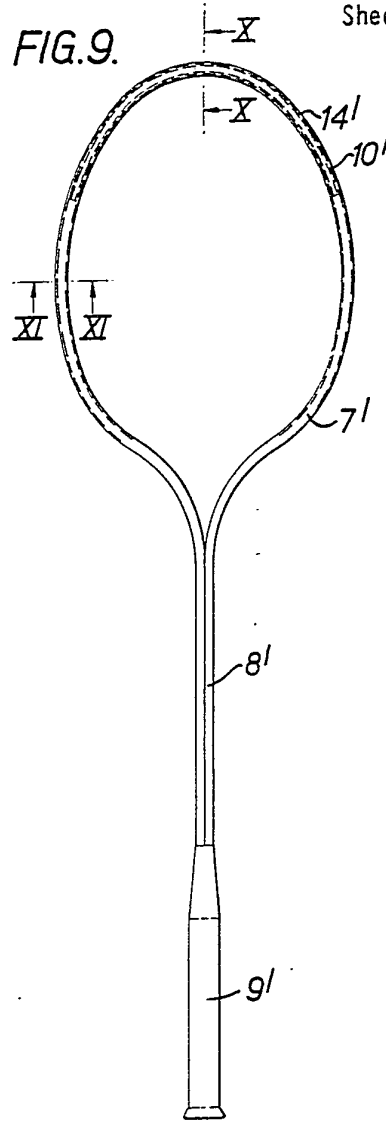

This drawing is a reproduction of the Original on a reduced scale

Sheets 1 & 2

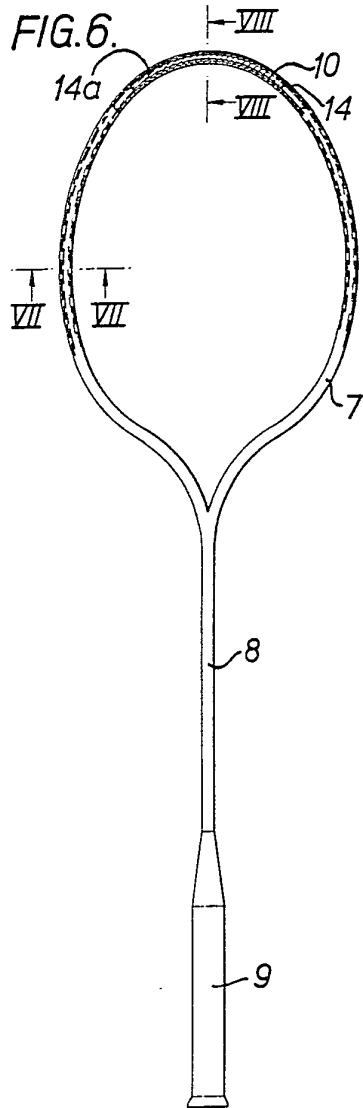

6

